


Level Regulator KR 1 to fill



Nominal Values:


max. Operating temp.	60° C
Power	10(8)A/250V
Contacts	normally open
Switching angle	45°
Protection type:	IP68 / 2 bar
Protection class	II
Housing	Polypropylene (PP)
Height/diameter	40 mm / 100 mm
Cable	H07RN-F 3G1,0mm ²

Assembly:

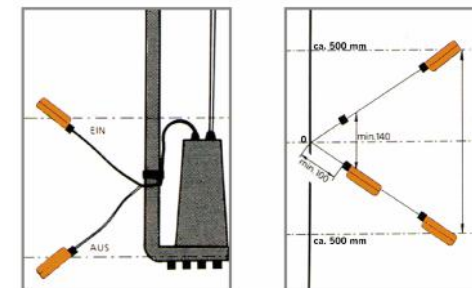

Electrical Connection:

Before connecting to electricity, rectifying faults or carrying out maintenance work, the electrical system must be disconnected from the power supply. Ensure that neither water nor moisture can enter via the cable ends.

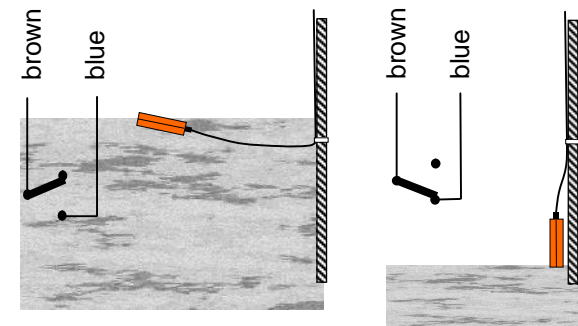

To fill: connect brown – blue

Ground/PE: yellow / green

Maintenance:

If the float switch is installed and assembled correctly, it should work practically maintenance-free for many years. Depending on the level of contamination in the medium, the system only needs to be checked from time to time and the float switch cleaned if necessary.

EC Declaration of Conformity
in accordance with
EC Low-Voltage Directive 2006 /95 / EG
EC Environmental Protection Directive RoHS 2002 / 95 / EG
We,
NOLTA GmbH, 35091 Coelbe,

hereby declare that the products manufactured by us comply with the current fundamental requirements with regard to safety and environmental protection as outlined in the EC directives with regard to their design and construction and this also applies to the version brought to the market by us. This declaration becomes null and void if alterations are made to the level regulator without being agreed with us beforehand.

Applicable harmonised standards:

- **DIN EN 60730-1 (VDE 0631-1)**
- **DIN EN 60730-2-15 (VDE 0631-2-15)**
- **DIN IEC 60730-1 (VDE 0631-1)**

Coelbe, 28/10/2013

.....
Dr.-Ing. Jochen Knake
Managing Director

.....
Wolfgang Seip
Quality Management